



Made in Germany!
Importer: Ltd "Abschliff Latvija"
Riga, A Čaka iela 107 K2
Phone: +371 67843844, 67843845
Fakss: +371 67272792
Mob.: +371 26177888
E-mail: info@abschliff.lv
www.abschliff.lv

<https://www.facebook.com/Abschliff-Latvija-100679528475676/>



Open: Monday to Friday – 9⁰⁰-18⁰⁰, Saturday- 10⁰⁰-14⁰⁰, Sunday – closed

Avalon Arbeitsplattenol - waterproof oil with wax

Description


Oil with wax for impregnation of work surface, furniture surfaces and children toys made from wood. Quick and easy to apply. High resistance against coffee, red wine, fruit juice etc. according to DIN (German Industrial Standard) 68861 part 1B (furniture surfaces). DIN EN 71, part 3 certified as suitable for toys. High penetration, breathable, anti-static, enhances the natural structure of the wood.

Colour

Transparent, colourless to slightly yellow.

Ingredients

Linseed oil, wood oil, castor oil, natural resin ester, isoparaffinic hydrocarbons, micro wax, silicic acid, zinc oxide, drying agents. The VOC content of this product is 345 g/l. EU limit value max 700 g/l (class "f" 2010).

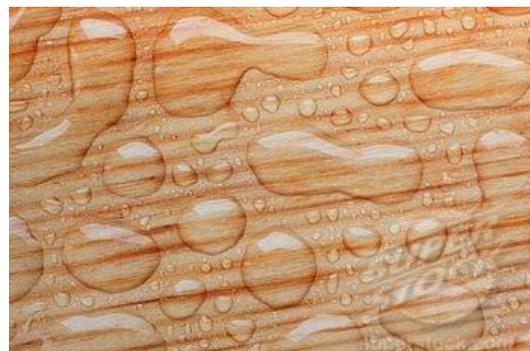

Hazard statements

Harmful to aquatic life with long lasting effects. Repeated exposure may cause skin dryness or cracking.

Surface preparation

The surface must be absorbent, dry (moisture content below 14%), solid, clean and free of dust and grease. Sand surface gradually up to 240 grain.

Application

The product is ready for use. Apply 1 - 3 thin and even coats at temperatures above 15°C. Lower temperatures will delay the drying process. Important information: Please remove excess oil carefully after approx. 30 minutes and polish the surface with a cloth or pad. Always apply a test coat. Ensure good light and ventilation conditions during use and drying times.

Drying time

First coat 12 - 24 hours (at 20°C and 50 - 55% relative humidity) ready for further coatings. Final degree of hardening is reached after 7 - 10 days.

Packaging and consumption

Approx. 20 - 50 ml/m² or 20-50 m²/1 l, depending upon the condition and absorbency of the surface.

Packaging: 0.25l for 6,5 m², 0.75l for 19 m², 2.5l for 63 m²

Storage

Under cool and dry conditions. Close lid tightly when not in use. Once package has been opened film forming can appear. Skim off film before use. Shelf-life of unopened container 5 years.

Disposal

According to locally regulated laws. European Waste Catalogue (EWC) 08 01 11.

Cleaning up

Clean surfaces with neutral detergents in lukewarm water. Clean equipments immediately after use with solvents.

Precautionary statements

Keep out of reach of children. IF SWALLOWED: Call a POISON CENTER/doctor if you feel unwell. Do NOT induce vomiting. Avoid release to the environment. Dispose of contents/container according to local regulations. Always be sure to store cleaning cloth, polishing pads, sponges, etc. that are still wet or even slightly moist with product in an airtight metal container or in water and dispose, as there is a danger of spontaneous combustion caused by the plant oil content in the product. The product alone will not undergo spontaneous combustion. A typical smell may arise due to the natural raw materials. During sanding wear mask against respirable dust.

Safety data sheet available on request.

